


DWM-313

4G M2M Router



Key Features

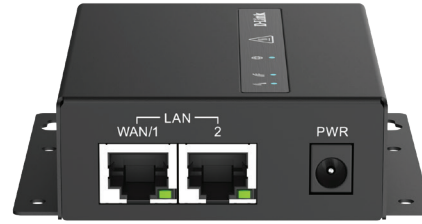

Dual-SIM Failover



VPN Security



Eth and 4G Failover



SMS Event Management



Industrial Grade Design



Management Platform

Applications

- Store and Shop
- Remote Branch
- Mobile Office
- Popup and Booth

The DWM-313 4G M2M Router delivers LTE Cat 4 capability. It is equipped with two Fast Ethernet ports, one of which can be configured as an Ethernet WAN. This allows easy switching between broadband and 4G LTE. Additionally, Wi-Fi N150 connectivity is provided, making it suitable for a wide range of M2M applications.

Carrier Diversity and Network Redundancy

The DWM-313 ensures continuous service with dual SIM (Micro-SIM 3FF) support for enhanced carrier diversity and network redundancy. Reliable connectivity even in locations with limited coverage is now possible. Additionally, it includes two LAN ports, one configurable as a WAN, giving you flexible options to seamlessly switch between Ethernet WAN and LTE connections, ensuring you always have the best network access.


Secure Your Network with VPN

The DWM-313 boosts network security with robust VPN support, offering protocols such as IPSec, OpenVPN, PPTP, L2TP, and GRE. These features enable encrypted connections, versatile tunneling, and secure remote access to protect sensitive data effectively. Ideal for retail operations, small shops, pop-up booths, and smart parking systems, the DWM-313 ensures that financial transactions and customer information are securely managed and transmitted.

Robust Build Quality

The DWM-313 is designed to maximize M2M connection reliability and availability, featuring a corrosion-resistant zinc-plated steel casing, wide operating temperature range and humidity tolerance, making it suitable for the most demanding M2M applications in virtually any environment. Convenient wall mounting and DIN-rail design allows the DWM-313 to be mounted virtually anywhere to optimize signal quality.

Connection Diagram

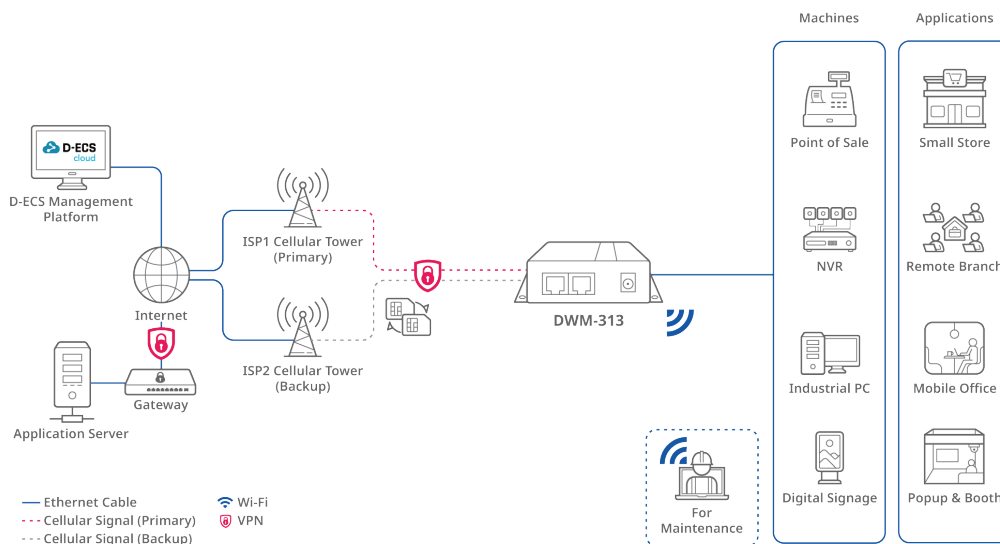

Specifications

Device Interface

- Cellular: 4G LTE Cat 4
- SIM Slot: 2 x SIM (Micro SIM) with auto failover
- Ethernet: 1 x FE WAN/LAN port, 1 x FE LAN port
- Wi-Fi: Wi-Fi N150 (2.4 GHz)
- Log Storage: Micro SD slot
- Power Input: DC 5 V (DC jack)
- Antenna Connectors: 2 x SMA (F) cellular, 1 x SMA (RP-F) Wi-Fi

Performance¹

- Maximum Cellular Data Throughput:
 - LTE: 150 Mbps (DL) / 50 Mbps (UL)
- Maximum Wi-Fi Data Rate:
 - 2.4 GHz: Up to 150 Mbps

WAN

- WAN Interface: Cellular, Ether-WAN
- Multi-WAN Function: Failover
- Cellular: NAT, bridge
- Ether-WAN: Dynamic IP, static IP, PPPoE, PPTP, L2TP
- Connection Monitoring: Ping/DNS query reboot

Network

- LAN & VLAN: DHCP server/relay, port/tag-based VLAN
- Routing: Static, dynamic RIPv1/v2, OSPF
- DDNS: DynDNS, No-IP, dynamic DO

Wi-Fi

- Function: Multi SSID, WIDS, AP router mode
- Security: WPA/WPA2, WPA2, WPA2-PSK, WPA-PSK/WPA2-PSK, 802.1x
- Encryption: WEP, AES, TKIP/AES

Services

- Cellular Toolkit: Data usage, SMS, SIM PIN, network scan
- Event Management: SMS, e-mail

VPN

- VPN Tunnel: IPSec, OpenVPN, PPTP, L2TP, GRE
- VPN Pass Through: IPSec, PPTP, L2TP

Security

- Firewall: SPI firewall, IPS, port forward
- Access Control: MAC/IP filter, URL blocking

Administration

- Management: SNMPv1/2/3, D-Link D-ECS²
- Maintenance: Web UI, diagnostic tools via ping/tracert
- System: FW upgrade, reboot and reset
- Logging: System log, external syslog server

Monitoring

- Device Status: CPU/memory usage, WAN status, client list
- Cellular Status: IMSI, ICCID, operator, band, RSSI, SINR, RSRP, RSRQ
- Security: VPN status, firewall status
- Statistics and Reports: Cellular signal, cellular usage

Operating Environment

- Operating Temperature: -30 to 70°C (-22°F to 158°F)
- Storage Temperature: -40 to 85°C (-40°F to 185°F)
- Operating Humidity: 10% to 95% non-condensing
- Storage Humidity: 0 to 95% non-condensing
- Dimensions: 90 x 90 x 27 mm

Certifications and Approvals

- Certifications: CE, UKCA

Package Contents (Standard)

- 2 x Cellular SMA Antennas
- 1 x Wi-Fi RP-SMA Antenna
- 1 x RJ-45 Cable
- 1 x Power Adapter
- 1 x DIN-Rail Kit

Available Versions


EU SKU (HW: C1)

4G LTE	FDD: B1/B3/B7/B8/B20/B28A
	TDD: B38/B40/B41

- 1 Data rates are theoretical. Data transfer rate depends on network capacity and signal strength.
2 You only have to pay a M2M device license fee when applying for D-ECS license.

Hardware

Front View

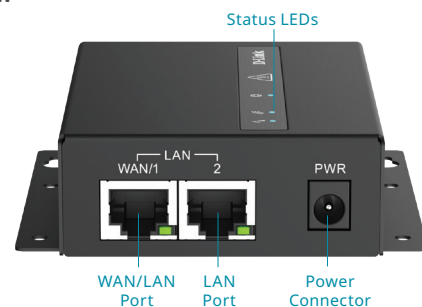

Back View

